



elnagh





elnagh



BARON



BARON



T-LOFT



MAGNUM

INDEX

ELNAGH BRAND	P.4
ELNAGH RANGE 2021	P.6
BODY PROTECTION SYSTEM	P.8
COMFORT AND FUNCTIONALITY	P.10
BARON	P.36
T-LOFT	P.54
MAGNUM	P.72
QUALITY AND TESTS	P. 74




SINCE 1950 ON THE ROADS OF THE WORLD

1950'



1950'



1960'



1970'



1980'



1990'



2021



ELNAGH IS:

- AN INTEGRAL PART OF THE HISTORY OF THE ENTIRE VEHICLE INDUSTRY WITH 70 YEARS OF ACTIVITY BEHIND IT.
- SOLIDITY AND STRENGTH
- A BRAND THAT OFFERS REAL AND PRACTICAL SOLUTIONS.
- A BRAND THAT NEVER GOES OUT OF STYLE.



ELNAGH 2021 RANGE

WE ARE READY TO GO

Elnagh creates campers. An Elnagh camper is a jewel of precision and comfort.



BARON



BARON 22 ← l. 6990 mm →



BARON 26 ← l. 6990 mm →



BARON 65 ← l. 6990 mm →



T-LOFT




T-LOFT 450 ← l. 6990 mm →



T-LOFT 529 ← l. 6990 mm →



T-LOFT 530 ← l. 7410 mm →

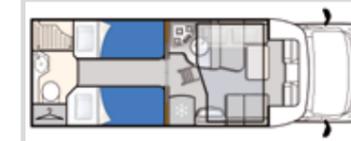

T-LOFT 531 ← l. 7410 mm →




T-LOFT 581 ← l. 7410 mm →




BARON



BARON 531 ← l. 5990 mm →

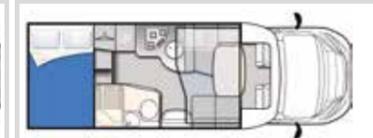


BARON 560 ← l. 6990 mm →

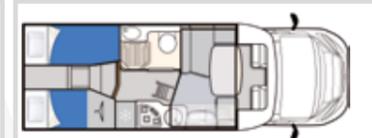

BARON 565 ← l. 6990 mm →



BARON 573 ← l. 7410 mm →

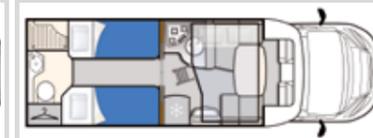

BARON 575 ← l. 7410 mm →



BARON 579 ← l. 7410 mm →



MAGNUM



MAGNUM 530 ← l. 7410 mm →




MAGNUM 531 ← l. 7410 mm →



MAGNUM 581 ← l. 7410 mm →

BODY PROTECTION SYSTEM

THE BODY STRUCTURE

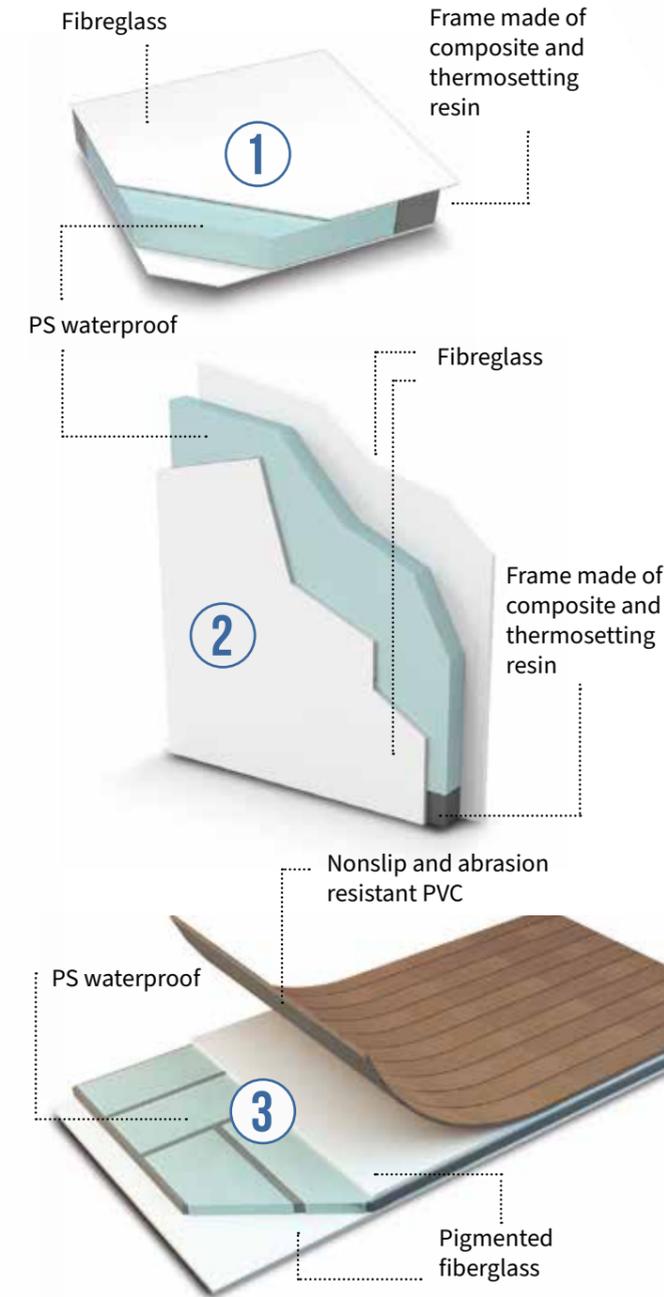

Body Protection System



1
Total absence of wood

2
Total waterproofing and higher heat insulation

5
Lighter and more resistant structure thanks to the use of bi-composite thermosetting resins



3
Highest torsion resistance and more stability

4
Higher wear resistance and easy maintenance

COMFORT AND FUNCTIONALITY

ALWAYS COMFORTABLE, ESPECIALLY ON HOLIDAY

Elnagh has always given importance to colours and internal styles to live your motorhome in the name of relaxation and functionality. The trend is to recreate a comfortable and functional environment, making the most of the space available.




VARIABLE VOLUME GARAGE. THANKS TO THE MANUAL MECHANISM, THE BED CAN BE CONVENIENTLY HEIGHT-ADJUSTED




GARAGE DOORS IN FIBERGLASS. OPENING AND ACCESS TO THE GARAGE ON BOTH SIDES OF THE MOTORHOME.



VARIABLE VOLUME GARAGE PROVIDED ON THE TYPES:

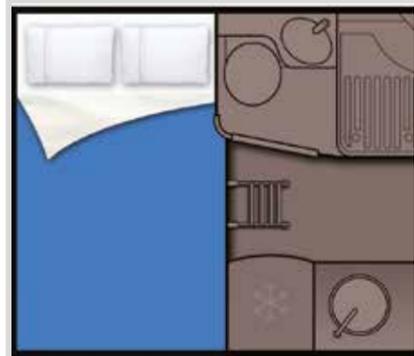

FULL-WIDTH BED
Baron 26 – Baron 560
T-Loft 450

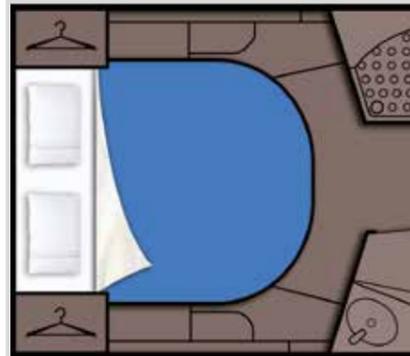

QUEEN BEDS
Baron 579 – T-Loft 581
Magnum 581



REINFORCED GARAGE FLOOR FOR A MAXIMUM LOAD CAPACITY OF UP TO 300 KG



STOWAGE IN THE LIVING AREA



WALL UNITS WITH LARGE DIMENSIONS, DESIGNED IN A RATIONAL AND FUNCTIONAL WAY THANKS TO THE DOUBLE SHELF



PRACTICAL FLOOR RECESSED STORAGE HATCHES (T-LOFT AND MAGNUM RANGE)

STOWAGE IN THE SLEEPING AREA



CENTRAL BEDS WITH OPENING MECHANISM TO STORE EVEN THE MOST BULKY THINGS



LIFTABLE TWIN BEDS FOR WARDROBES, CLOSETS AND COAT RACKS



BARON

ELNAGH WELCOMES YOU INTO THE FAMILY




2950-3200 MM

5990/7410 MM

4-7	4-7	3500 KG 2,3 MJT 140 CV	3500 KG 2,2 L BLUEHDI 140 CV	COMBI 4	142/150 LT.


Photographs may show vehicles fitted with optional features and may content photography props not included in the standard specification of the vehicle.

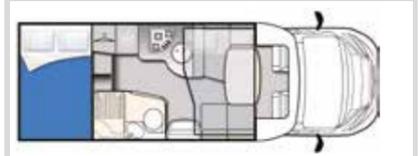


BARON 560



BARON 565

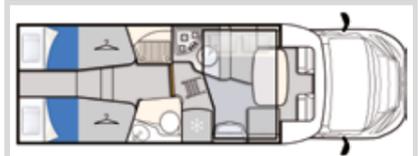

BARON 573

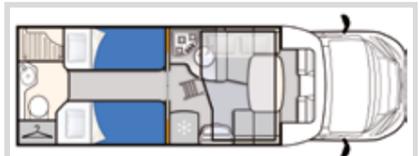

BARON 575



BARON 579



BARON 22



BARON 26



BARON 65



BARON 531

Pleated sliding mosquito net on entrance door

Entrance door with window

XL overcab

Seitz windows

IF YOU HAVE NEVER CLIMBED INTO AN ELNAGH CAMPER, BARON IS THE ONE FOR YOU.

Baron is the perfect camper for those who want to grab their bags and set off without any limitations. Baron is warm if you want to travel northwards and cool if you prefer to head south. It is comfortable in the winter and a pleasant refuge from the heat in the summer. Elmagh has already thought of everything, you just have to turn the key.



Curved doors allow for more storage inside the wall unit

Upholstery under folding bed with LED backlit panel

Large refrigerator 142 l / 150 l depending on model

Entrance wall with mirror and practical storage pockets

BARON 579

THE UPHOLSTERY OF THE BARON RANGE OF LOW-PROFILES AND COACHBUILDS



MILK (STD)




SUGAR (OPT)




COFFEE (OPT)

TYPES OF DINETTE ON THE BARON RANGE OF LOW-PROFILES COACHBUILDS

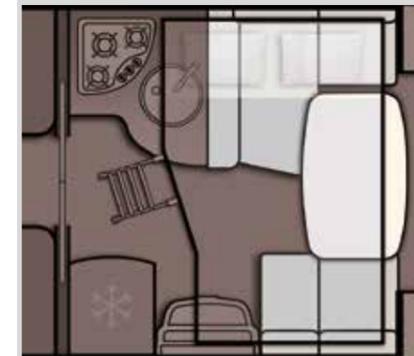


L-SHAPED DINETTE WITH BENCH OR DOUBLE SIDE BENCH

Baron 565 – Baron 560
Baron 579 – Baron 575 - Baron 65

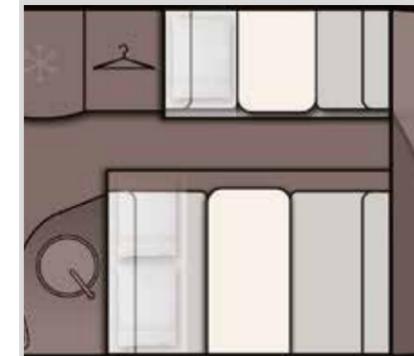

DOUBLE DINETTE

Baron 22

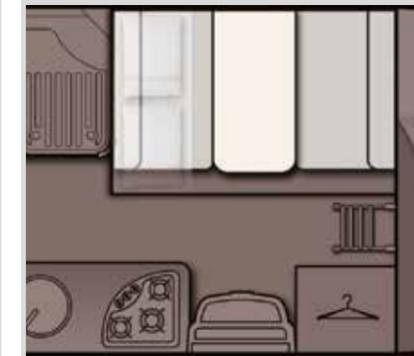


CLASSIC OPPOSING DINETTE

Baron 26



L-SHAPED DINETTE WITH BENCH

Baron 531

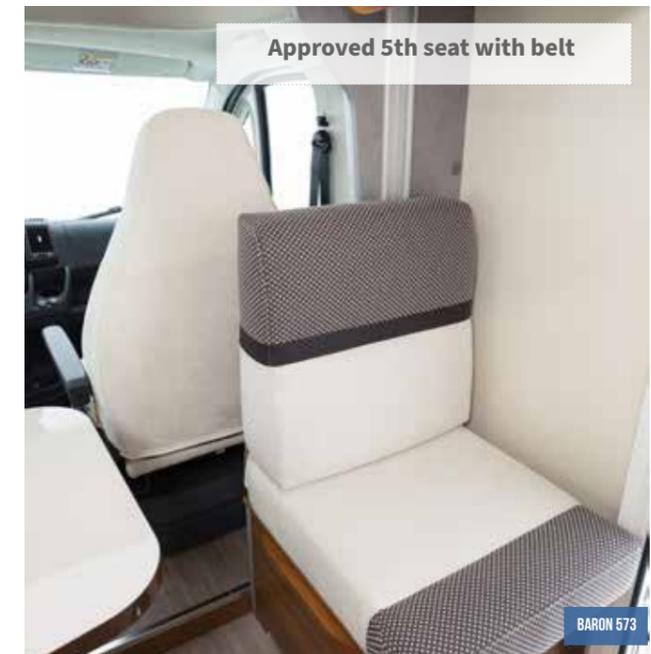



BARON 531



Table that can be moved and rotated 360° (Baron low-profiles)


BARON 531



BARON 26



BARON 26

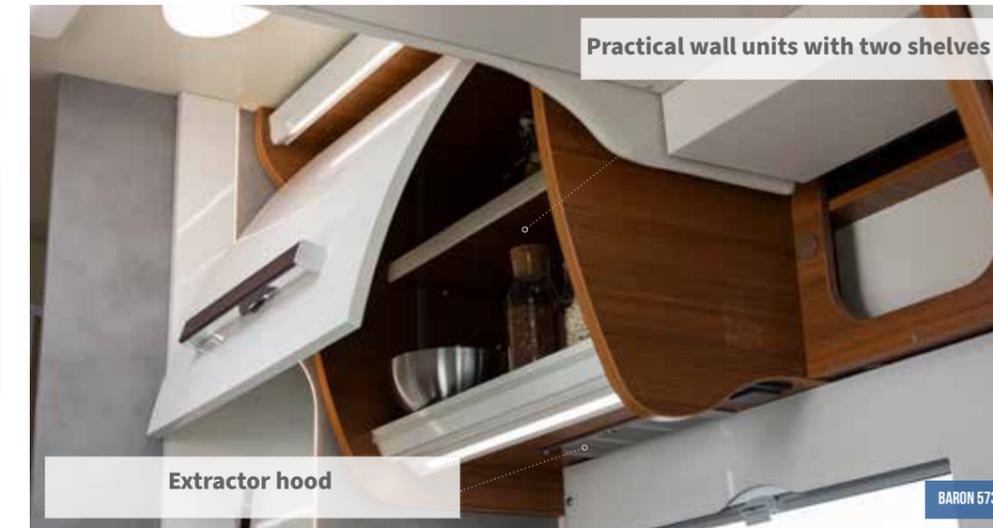



BARON 531



Rooflight 40x40 cm with cover panel and spotlights

Partition door from sleeping area to living area

Central beds and garage can be manually adjusted in height

BARON 579



BARON 531



BARON 560



BARON 560



BARON 560

- LARGE AND FUNCTIONAL STORAGE COMPARTMENT UNDER THE DOUBLE BED
- EVERYTHING IS IN ORDER IN THE COMPARTMENTS INSIDE THE STEPS
- CABINETS EQUIPPED WITH POLE TO HANG YOUR CLOTHES



Easy access to spaces thanks to the lids that can be opened like doors

Liftable twin beds for large storage spaces under the beds

Bed nets with wooden slats

BARON 573



Rooflight with blind and flyscreen



Height-adjustable bed

BARON 26



Maxi overcab with depth of 1500 mm. Overcab with window and comfortable storage pockets

BARON 26



Comfortable spotlights for evening reading

Handy side shelves

Transformation of twin beds into a maxi double bed up to 2000x2100 mm

BARON 573



Shower separate from washbasin with rigid closing doors

Rigid door for your privacy

Bathroom window with blinds


BARON 573

TYPES OF BATHROOMS ON THE BARON RANGE OF LOW-PROFILES AND COACHBUILDS




BARON 531


- SPACIOUS AND BRIGHT ROOM WITH A WINDOW AND BLIND.
- LARGE AND COMFORTABLE SHOWER SEPARATED FROM THE WASHBASIN.
- WALL UNIT, UNDER-WASH CABINET AND STORAGE COMPARTMENT ALLOW YOU TO HAVE EVERYTHING IN ORDER AND WITHIN EASY REACH.

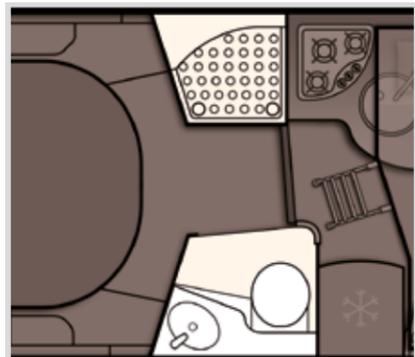

INDEPENDENT BATHROOM AND SHOWER
Baron 579 – Baron 573

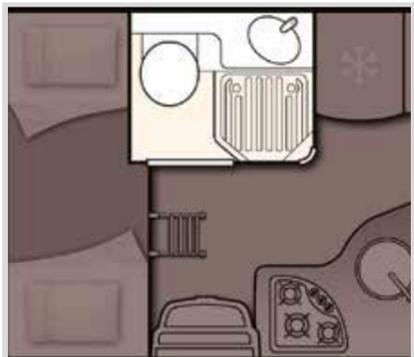

BATHROOM WITH SEPARATE SHOWER
Baron 560 – Baron 565 – Baron 22
Baron 26 – Baron 65 - Baron 531

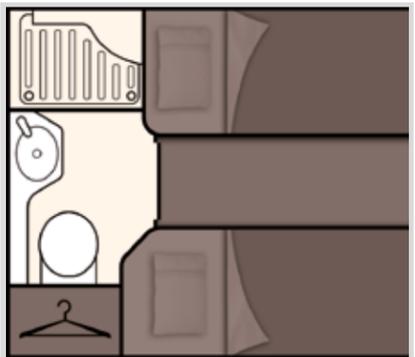

BATHROOM AND SHOWER AT THE END OF THE VEHICLE
Baron 575



BARON 573



BARON 579




BARON 560

MODEL	WEIGHT KG	BARON 22		BARON 26		BARON 65		BARON 531		BARON 560		BARON 565	
MECHANICAL UNIT	-	Fiat Ducato	Citroen Jumper	Fiat Ducato	Citroen Jumper	Fiat Ducato	Citroen Jumper	Fiat Ducato	Citroen Jumper	Fiat Ducato	Citroen Jumper	Fiat Ducato	Citroen Jumper
ENGINE POWER HP	-	2,3 MJ - 140 CV	2,2 - 140 CV	2,3 MJ - 140 CV	2,2 - 140 CV	2,3 MJ - 140 CV	2,2 - 140 CV	2,3 MJ - 140 CV	2,2 - 140 CV	2,3 MJ - 140 CV	2,2 - 140 CV	2,3 MJ - 140 CV	2,2 - 140 CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	-	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS MIN / MAX (KG)	-	2835 / 2910	2835 / 2910	2910 / 2995	2910 / 2995	3010 / 3080	3010 / 3080	2810 / 3170	2810 / 3170	2960 / 3080	2960 / 3080	2970 / 3080	2970 / 3080
PAYLOAD MIN / MAX (KG)	-	590 / 665	590 / 665	505 / 590	505 / 590	420 / 490	420 / 490	330 / 690	330 / 690	420 / 540	420 / 540	420 / 530	420 / 530
WHEELBASE (MM)	-	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800	3800
MAXIMUM TOWABLE WEIGHT (KG)	-	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
WHEELS DIMENSIONS	-	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"
MANUAL AIR CONDITIONING	-	S	S	S	S	S	S	S	S	S	S	S	S
DRIVER AND PASSENGER AIRBAG	-	S/S	S/O	S/S	S/O	S/S	S/O	S/S	S/O	S/S	S/O	S/S	S/O
CRUISE CONTROL WITH SPEED LIMITER	-	S	S	S	S	S	S	S	S	S	S	S	S
ABS / ESC / TRACTION+	- / - / 1	S/S/O	S/S/O	S/S/O	S/S/O	S/S/O	S/S/O	S/S/O	S/S/O	S/S/O	S/S/O	S/S/O	S/S/O
SWIVELLING DRIVER AND PASSENGER'S SEAT	-	- / -	- / -	- / -	- / -	- / -	- / -	S/S	S/S	S/S	S/S	S/S	S/S
CAB SEAT COVERS	-	S	S	S	S	S	S	S	S	S	S	S	S
AUTOMATIC GEAR	33	0	0	0	0	0	0	0	0	0	0	0	0
PAINTED CAB	-	0	0	0	0	0	0	0	0	0	0	0	0
PAINTED FRONT BUMPER	-	0	0	0	0	0	0	0	0	0	0	0	0
DRL (DAY RUNNING LIGHT) / ANTI FOG LIGHTS	0,5/2	0/0	0/0	0/0	0/0	0/0	0/0	0/0	0/0	0/0	0/0	0/0	0/0
2 Din Radio / Bluetooth Radio / Steering Wheel Radio Controls	2/3/1	0/0/0	0/1/0	0/0/0	0/1/0	0/0/0	0/1/0	0/0/0	0/1/0	0/0/0	0/1/0	0/0/0	0/1/0
DIMENSIONS AND PLACES													
EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	-	6990 / 2350	6990 / 2350	6990 / 2350	6990 / 2350	6990 / 2350	6990 / 2350	5990 / 2350	5990 / 2350	6990 / 2350	6990 / 2350	6990 / 2350	6990 / 2350
EXTERNAL HEIGHT (MM) / INTERNAL HEIGHT (MM)	-	3200 / 2080	3200 / 2080	3200 / 2080	3200 / 2080	3200 / 2080	3200 / 2080	2950 / 2080	2950 / 2080	3200 / 2080	3200 / 2080	2950 / 2080	2950 / 2080
CAPACITÀ MAX SERBATOI: ACQUE CHIARE, ACQUE GRIGIE (L)**	-	7	7	6	6	5	5	4	4	5	5	5	5
BERTHS (OPTIONAL DINETTE)	-	7 (-)	7 (-)	6 (-)	6 (-)	5 (-)*	5 (-)*	4 (-)	4 (-)	4 (0)	4 (0)	4 (0)*	4 (0)
AUXILIARY BED IN DINETTE	5	S	S	S	S	S	S	0	0	0	0	0	0
REAR BED (CM)	-	89x220 / 89x220	89x220 / 89x220	140x126x220	140x126x220	83x200 / 83x190 - 182x212	83x200 / 83x190 - 182x212	216x139(130)	216x139(130)	140x220	140x220	83x200 / 83x200 - 182x212	83x200 / 83x200 - 182x212
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	-	180x125	180x125	216x96x51	216x96x51	208x89(67)	208x89(67)	216x96x51	216x96x51	216x110x99	216x110x99	216x107x57	216x107x57
OVERCAB BED (CM) / ELEVATING BED (CM)	-	150x209 / -	150x209 / -	150x209 / -	150x209 / -	150x209 / -	150x209 / -	- / 195x130x110					
ADDITIONAL SEAT REAR BED	-	S	S	S	S	S	S	S	S	S	S	S	S
LOCKER (USEFUL OPENING, CM)	-	125x70 / 125x70	125x70 / 125x70	115x95 / 115x95	115x95 / 115x95	115x80 / 115x80	115x80 / 115x80	115x95 / 115x95	115x95 / 115x95	115x80 / 115x80	115x80 / 115x80	115x95 / 115x95	115x95 / 115x95
MAX. INTERNAL GARAGE HEIGHT (CM)	-	117,5	117,5	119	119	119	119	119	119	119	119	117	117
FLOOR / WALLS / ROOF THICKNESS (MM)	-	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31
FLOOR / WALLS / ROOF MATERIAL (MM)	-	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	-	S	S	S	S	S	S	S	S	S	S	S	S
INSTALLATIONS													
BURNERS / GAS OVEN / SUCTION HOOD	- / 14 / -	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S
TANK CAPACITY : CLEAR WATER / WASTEWATER (L)**	-	20 (118) / 89	20 (118) / 89	20 (115) / 100	20 (115) / 100	20 (118) / 100	20 (118) / 100	20 (115) / 100	20 (115) / 100	20 (118) / 100	20 (118) / 100	20 (118) / 100	20 (118) / 135
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)	-	149 L	149 L	149 L	149 L	142 L	149 L	149 L					
COMPRESSOR FRIDGE (L)	-	-	-	-	-	-	-	-	-	-	-	-	-
STANDARD HEATING SYSTEM	-	Combi 4 Gas	Combi 4 Gas	Combi 4 Gas	Combi 4 Gas	Combi 4 Gas	Combi 4 Gas	Combi 4 Gas	Combi 4 Gas	Combi 4 Gas	Combi 4 Gas	Combi 4 Gas	Combi 4 Gas
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	-	2x15	2x15	2x15	2x15	2x15	2x15	2x15	2x15	2x15	2x15	2x15	2x15
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	-	S	S	S	S	S	S	S	S	S	S	S	S
SHOWER TRAY WITH DOUBLE DRAIN	-	S	S	S	S	S	S	S	S	S	S	S	S
INTEGRATED AND ISOLATED ENTRY STEP	- / 4	S/O	S/O	S/O	S/O	S/O	S/O	S/O	S/O	S/O	S/O	S/O	S/O
HEATED GARAGE LOCKER	-	S	S	S	S	S	S	S	S	S	S	S	S
SKYLIGHT													
PANORAMIC ROOF	-	-	-	-	-	-	-	S	S	S	S	S	S
REAR SKYLIGHT (MM)	-	400x400	400x400	400x400 (S) / 960x655 (O)									
CENTRAL SKYLIGHT (MM)	-	400x400	400x400	400x400	400x400	400x400	400x400	400x400	400x400	400x400	400x400	400x400	400x400
DINETTE SKYLIGHT (MM)	-	700x500	700x500	700x500	700x500	700x500	700x500	700x500	700x500	700x500	700x500	700x500	700x500
SKYLIGHT TOILETTE/SHOWER (MM)	-	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
400x400 SKYLIGHT (MM) WITH FAN	1	0	0	0	0	0	0	0	0	0	0	0	0
DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET	-	S	S	S	S	S	S	S	S	S	S	S	S
EQUIPMENTS													
PLEATED CAB BLIND / THERMAL BLIND	6/-	0/S	0/S	0/S	0/S	0/S	0/S	0/S	0/S	0/S	0/S	0/S	0/S
CAB / BODY CARPET	- / 10	S/O	S/O	S/O	S/O	S/O	S/O	S/O	S/O	S/O	S/O	S/O	S/O
CAB SEPARATION CURTAIN	2,5	0	0	0	0	0	0	0	0	0	0	0	0
REAR BED HEIGHT ADJUSTMENT	-	-	-	S	S	S	S	S	S	S	S	S	S
BEDS WITH STAVES	-	S	S	S	S	S	S	S	S	S	S	S	S
SWIVELLING LCD HOLDER	-	S	S	S	S	S	S	S	S	S	S	S	S
INTERNAL LED LIGHTENING	-	S	S	S	S	S	S	S	S	S	S	S	S
EXTERIORS													
REAR CAMERA WITH MONITOR INTEGRATED IN THE REAR MIRROR	1	0	0	0	0	0	0	0	0	0	0	0	0
SOLAR PANEL (FITTED) WITH REGULATOR	11	0	0	0	0	0	0	0	0	0	0	0	0
ENTRANCE DOOR WITH FIXED WINDOW	-	S	S	S	S	S	S	S	S	S	S	S	S
FLYSCREEN FOR ENTRANCE DOOR	-	S	S	S	S	S	S	S	S	S	S	S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	2	S	S	S	S	S	S	S	S	S	S	S	S
XL ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	-	-	-	-	-	-	-	-	-	-	-	-	-
STRIP OPENING WITH LOCKER	-	-	-	-	-	-	-	-	-	-	-	-	-
EXTERNAL LED LIGHT	-	S	S	S	S	S	S	S	S	S	S	S	S

* The values shown represent the minimum value of the vehicle in the basic configuration, and the maximum value that includes the maximum weight of accessories available and that can be installed in the basic configuration in the factory.
 **To increase the vehicle payload, when travelling it is possible to reduce the fresh water tank capacity to approx. 20 lt.


MODEL	WEIGHT KG	BARON 573		BARON 575		BARON 579	
MECHANICAL UNIT	-	Fiat Ducato	Citroen Jumper	Fiat Ducato	Citroen Jumper	Fiat Ducato	Citroen Jumper
ENGINE POWER HP	-	2,3 MJ - 140 CV	2,2 - 140 CV	2,3 MJ - 140 CV	2,2 - 140 CV	2,3 MJ - 140 CV	2,2 - 140 CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	-	3500	3500	3500	3500	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS MIN / MAX (KG)	-	2970 / 3080	2970 / 3080	3015 / 3075	3015 / 3075	2995 / 3075	2995 / 3075
PAYLOAD MIN / MAX (KG)	-	425 / 520	425 / 520	425 / 485	425 / 485	425 / 505	425 / 505
WHEELBASE (MM)	-	3800	3800	3800	3800	3800	3800
MAXIMUM TOWABLE WEIGHT (KG)	-	2000	2000	2000	2000	2000	2000
WHEELS DIMENSIONS	-	15"	15"	15"	15"	15"	15"
MANUAL AIR CONDITIONING	-	S	S	S	S	S	S
DRIVER AND PASSENGER AIRBAG	-	S/S	S/O	S/S	S/O	S/S	S/O
CRUISE CONTROL WITH SPEED LIMITER	-	S	S	S	S	S	S
ABS / ESC / TRACTION+	- / - / 1	S/S/O	S/S/O	S/S/O	S/S/O	S/S/O	S/S/O
SWIVELLING DRIVER AND PASSENGER'S SEAT	- / -	S/S	S/S	S/S	S/S	S/S	S/S
CAB SEAT COVERS	-	S	S	S	S	S	S
AUTOMATIC GEAR	33	0	0	0	0	0	0
PAINTED CAB	-	0	0	0	0	0	0
PAINTED FRONT BUMPER	-	0	0	0	0	0	0
DRL (DAY RUNNING LIGHT) / ANTI FOG LIGHTS	0,5/2	0/0	0/0	0/0	0/0	0/0	0/0
2 Din Radio / Bluetooth Radio / Steering Wheel Radio Controls	2/3/1	0/0/0	0/1/0	0/0/0	0/1/0	0/0/0	0/1/0
DIMENSIONS AND PLACES							
EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	-	7410 / 2350	7410 / 2350	7410 / 2350	7410 / 2350	7410 / 2350	7410 / 2350
EXTERNAL HEIGHT (MM) / INTERNAL HEIGHT (MM)	-	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080
CAPACITÀ MAX SERBATOI: ACQUE CHIARE, ACQUE GRIGIE (L)**	-	5	5	5	5	5	5
BERTHS (OPTIONAL DINETTE)	-	4 (0)*	4 (0)*	4 (0)*	4 (0)*	4 (0)	4 (0)
AUXILIARY BED IN DINETTE	5	0	0	0	0	0	0
REAR BED (CM)	-	83x200 / 83x200 - 182x212	83x200 / 83x200 - 182x212	75x190 / 75x205 / 140x212	75x190 / 75x205 / 140x212	160x190	160x190
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	-	216x96x51	216x96x51	216x114x87	216x114x87	216x107x57	216x107x57
OVERCAB BED (CM) / ELEVATING BED (CM)	-	- / 195x130x110	- / 195x130x110	- / 195x130x110	- / 195x130x110	- / 195x130x110	- / 195x130x110

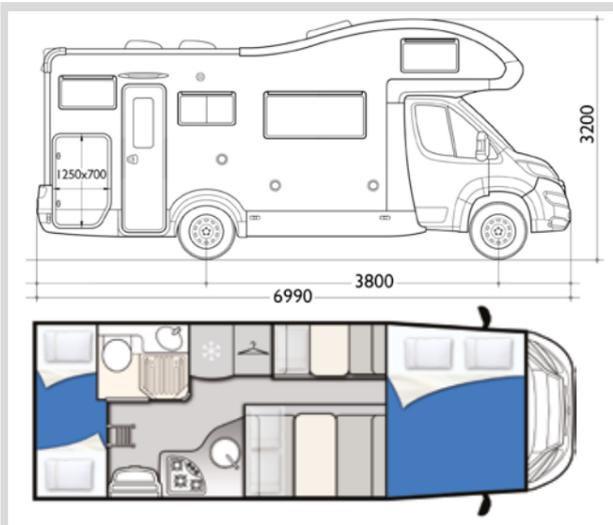

BARON 22

7	7	3500 KG 2,3 MJT 140 CV	3500 KG 2,2 L BLUEHDI 140 CV	COMBI 4


External length (mm) / External width (mm)	6990 / 2350
External height(mm) / Internal height (mm)	3200 / 2080
Wheelbase (mm)	3800
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2835 - 2910
Max. user payload Min – Max (kg)*	590 - 665
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118)/89
Standard heating system	COMBI 4 GAS

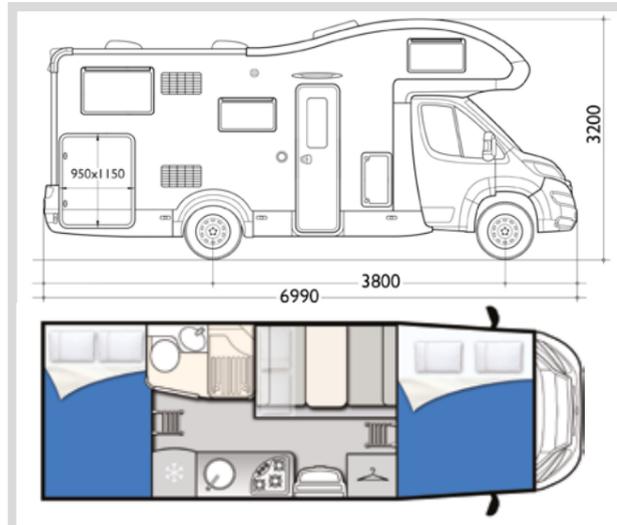

BARON 26

6	6	3500 KG 2,3 MJT 140 CV	3500 KG 2,2 L BLUEHDI 140 CV	COMBI 4

External length (mm) / External width (mm)	6990 / 2350
External height(mm) / Internal height (mm)	3200 / 2080
Wheelbase (mm)	3800
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2910 - 2995
Max. user payload Min – Max (kg)*	505 - 590
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20(115)/100
Standard heating system	COMBI 4 GAS

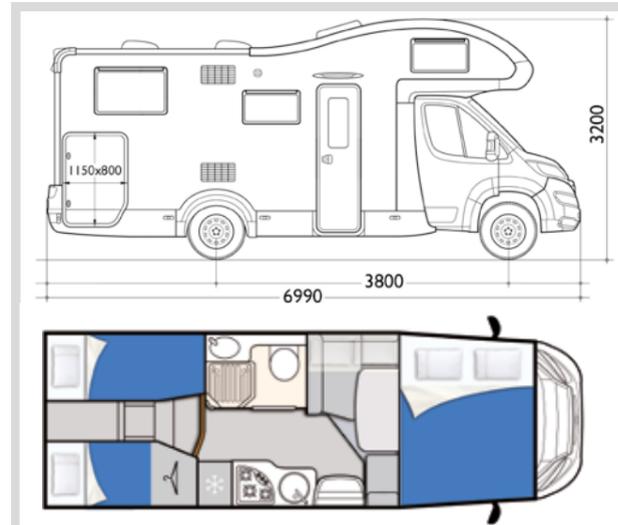


BARON 65

5	5	3500 KG 2,3 MJT 140 CV	3500 KG 2,2 L BLUEHDI 140 CV	COMBI 4

External length (mm) / External width (mm)	6990 / 2350
External height(mm) / Internal height (mm)	3200 / 2080
Wheelbase (mm)	3800
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	3010 - 3080
Max. user payload Min – Max (kg)*	420 - 490
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /100
Standard heating system	COMBI 4 GAS

Transformation of twin beds into a maxi double bed - * Pls. Check 20 lts. filling before driving

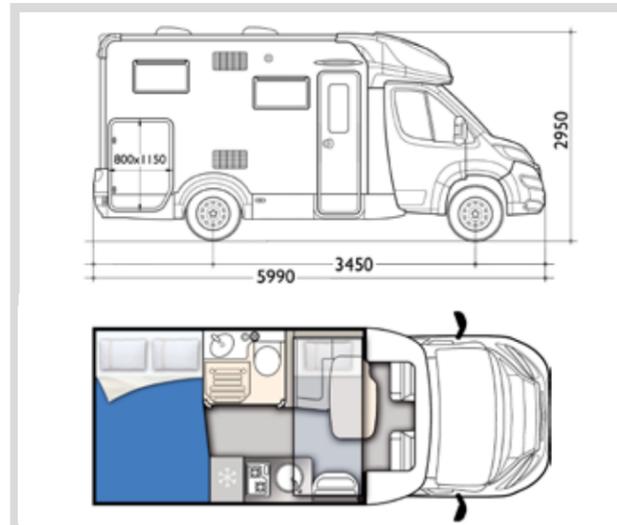


BARON 531

4	4	3500 KG 2,3 MJT 140 CV	3500 KG 2,2 L BLUEHDI 140 CV	COMBI 4

External length (mm) / External width (mm)	5990 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	3450
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2810 - 3170
Max. user payload Min – Max (kg)*	330-690
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /100
Standard heating system	COMBI 4 GAS


*The values shown represent the minimum value of the vehicle in the basic configuration, and the maximum value that includes the maximum weight of accessories available and that can be installed in the basic configuration in the factory. The homologation data refer to the Fiat chassis. The Citroen chassis is in registration phase.

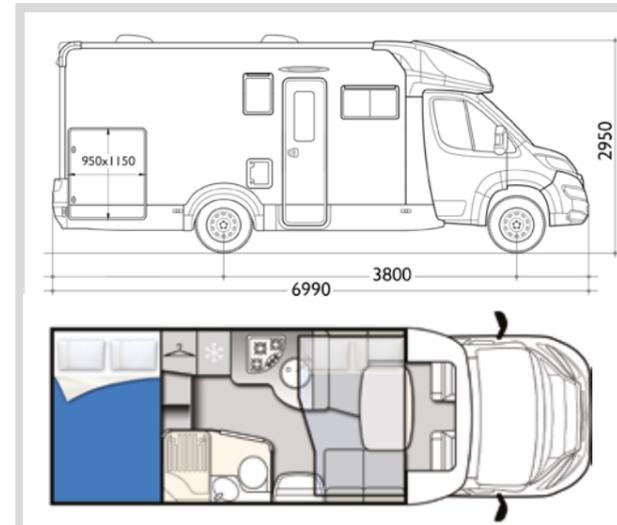

BARON 560

5	4	3500 KG 2,3 MJT 140 CV	3500 KG 2,2 L BLUEHDI 140 CV	COMBI 4


External length (mm) / External width (mm)	6990 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	3800
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2960 - 3080
Max. user payload Min – Max (kg)*	420 - 540
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /100
Standard heating system	COMBI 4 GAS

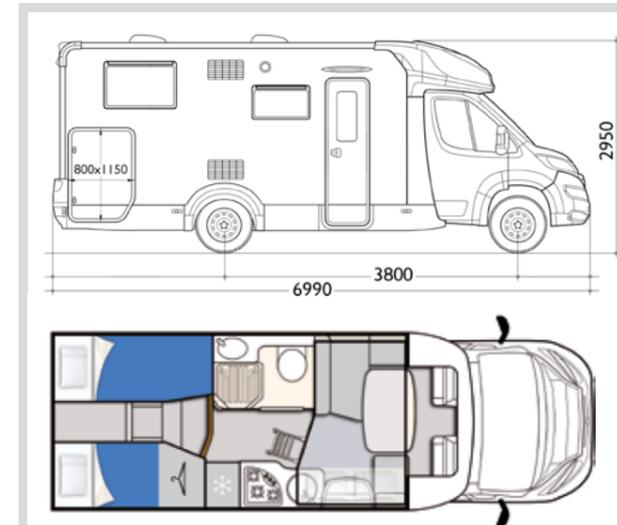

BARON 565

5	4**	3500 KG 2,3 MJT 140 CV	3500 KG 2,2 L BLUEHDI 140 CV	COMBI 4


External length (mm) / External width (mm)	6990 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	3800
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2970 - 3080
Max. user payload Min – Max (kg)*	420 - 530
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /100
Standard heating system	COMBI 4 GAS

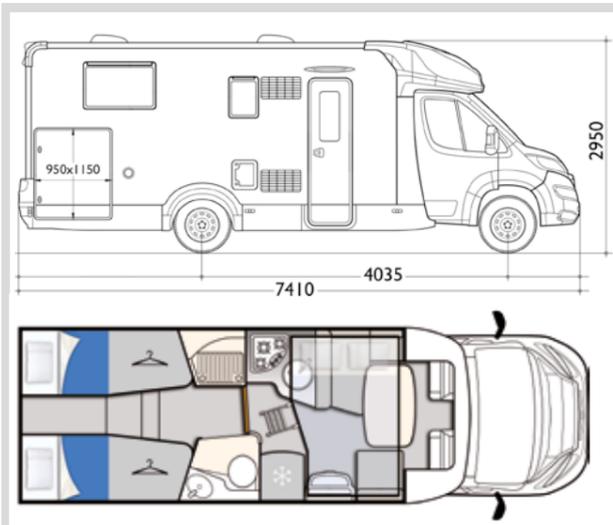

BARON 573

5	4**	3500 KG 2,3 MJT 140 CV	3500 KG 2,2 L BLUEHDI 140 CV	COMBI 4


External length (mm) / External width (mm)	7410 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	4035
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2980 - 3075
Max. user payload Min - Max (kg)*	425 - 520
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) / 135
Standard heating system	COMBI 4 GAS

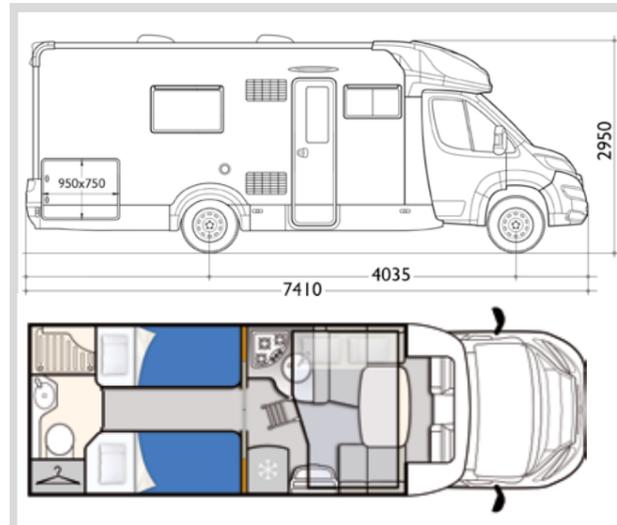

BARON 575

5	4	3500 KG 2,3 MJT 140 CV	3500 KG 2,2 L BLUEHDI 140 CV	COMBI 4

External length (mm) / External width (mm)	7410 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	4035
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	3015 - 3075
Max. user payload Min - Max (kg)*	425 - 485
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) / 135
Standard heating system	COMBI 4 GAS

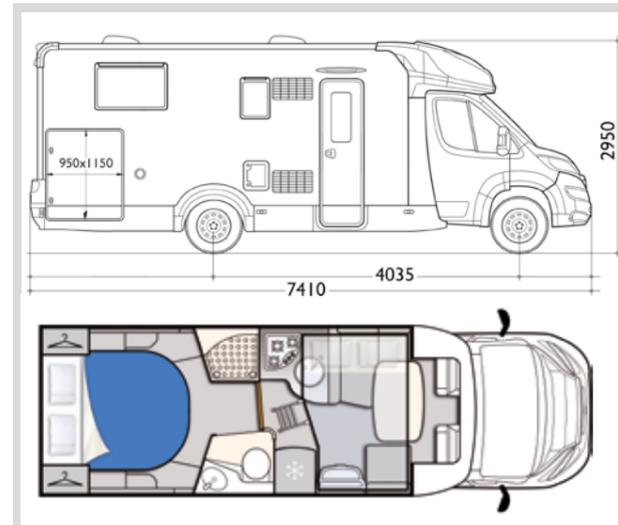

BARON 579

5	4	3500 KG 2,3 MJT 140 CV	3500 KG 2,2 L BLUEHDI 140 CV	COMBI 4

External length (mm) / External width (mm)	7410 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	4035
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2995 - 3075
Max. user payload Min - Max (kg)*	425 - 505
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) / 135
Standard heating system	COMBI 4 GAS

*The values shown represent the minimum value of the vehicle in the basic configuration, and the maximum value that includes the maximum weight of accessories available and that can be installed in the basic configuration in the factory. The homologation data refer to the Fiat chassis. The Citroen chassis is in registration phase. - *** Pls. Check 20 lts. filling before driving

NOTES

The masses indicated in this catalogue refer to the provisions of European Directive 2007/46/EC.

MASS IN RUNNING ORDER

It includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and a gas tank for living purposes (20 kg). The mass in running order, and consequently the payload and/or certified seats may vary depending on the accessories installed.

PAYLOAD

This consists of the difference between the maximum technically permissible laden mass and the mass in running order. It includes elements for living purposes, the transported passengers defined by the manufacturer (driver excluded), and the personal effects.

The payload calculation is based on the following parameters: 75 kg for each passenger (driver excluded), 10 kg of baggage for each passenger and for the driver, 10 kg for each metre of length of the vehicle, plus the remaining payload, which can be used for the installation of accessories or for additional baggage.

All masses and loads of the empty vehicle have a tolerance of +/- 5%, in compliance with Directive 2007/46/EC.

Any optional equipment increases the mass in running order and decreases the payload. The weight of non-standard accessories is not included in the mass in running order indicated in this catalogue.

Additional accessories and devices reduce the payload by a quantity equal to their weight; the incidence of the weight of the individual accessories is shown in the special column in the technical data sheets or can be requested at our dealers.

In case certain accessories are installed (for example, additional elements such as coupling device or motorbike rack), the mass of these accessories will affect the payload, possibly reducing it along with the number of certified seats. Please note that the law does not allow the maximum permissible mass to be exceeded, which can be consulted under the specific heading of the data sheets.

Please make sure that the maximum loads on the axles and the maximum technically permissible load mass are not exceeded during the complete loading phase of the vehicle.

The regulations and requirements of each country may entail changes in the characteristics of this table.

The number of certified seats may vary depending on the traffic regulations in force in each country. When driving, the fresh water tank must be filled to a maximum of 20 litres.



Garage doors with wide dimensions. Internal garage height up to 950x1150 mm

External LED light

Opening skydome with blinder and flyscreen



2-point type door, with window and flyscreen. Central locking.

EVERY VACATION IS A PERFECTLY BALANCED MIX OF RELAXATION, ADVENTURE AND WELLBEING.

T-Loft offers it to you all in one: the freedom of traveling easy on a journey of discovery of new and intriguing places, the pleasure of sleeping between two pillows before returning home satisfied and regenerated.

T-LOFT

FUNCTIONAL AND CREATED AROUND MAN



2950 MM

6990/7410 MM

5	4	3500 KG 2,3 MJT 140 CV	COMBI 4 DIESEL	142/150 LT.



T-LOFT 450



T-LOFT 529



T-LOFT 530



T-LOFT 531



T-LOFT 581



Handle for easy entry. Mirror at the entrance with LED light finish on the edge.

Door separating the living area from the sleeping area

Large refrigerator 142 l / 150 l depending on model

Side bench for approved 5th seat with belt

Folding table. Movable and with 360° rotation

T-LOFT 581

THE UPHOLSTERY OF THE T-LOFT RANGE



WAVE BEIGE




WAVE GREY




T-LOFT 450

TYPES OF DINETTE ON THE T-LOFT RANGE

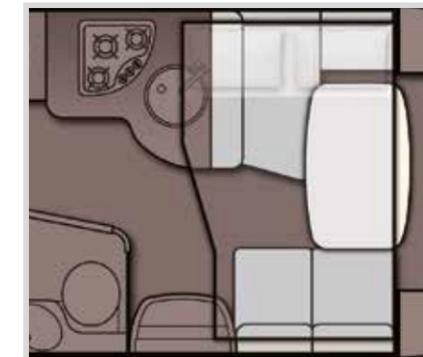

L-SHAPED DINETTE WITH DOUBLE SIDE BENCH

T-Loft 450 – T-Loft 531

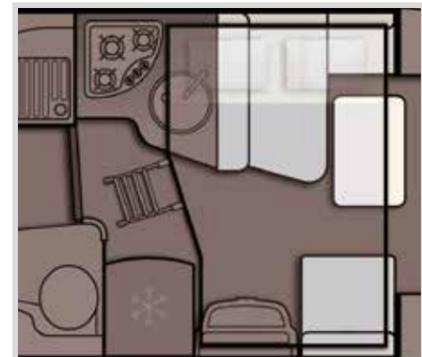

L-SHAPED DINETTE WITH SIDE BENCH

T-Loft 529 – T-Loft 530
T-Loft 581



Large Sky Roof with blind and flyscreen

Every space is functional to comfortably arrange everything

Convenient USB port for charging your multimedia systems

Swivel seats in the cab. Standard seat covers

T-LOFT 450



Cover panel under folding bed with integrated LED lights

T-LOFT 581



Practical floor recessed storage hatches

T-LOFT 581



T-LOFT 450



Electrically operated folding bed

1300 mm

1950 mm

T-LOFT 581



T-LOFT 450





Ducted heating in the room.

- EVERYTHING IS IN ORDER IN THE COMPARTMENTS INSIDE THE STEPS.
- CABINETS EQUIPPED WITH POLE TO HANG YOUR CLOTHES.
- SOCKET FOR TV ANTENNA IN THE ROOM.
- SPEAKERS FOR SOUND DIFFUSION IN THE ROOM.





Transformation of twin beds into a maxi double bed up to 2000x2100 mm

T-LOFT 530



T-LOFT 531



Access door to the bathroom at the end of the motorhome

Maximum relaxation thanks to reclining backrests (T-Loft 531)

Large storage spaces under the twin beds

T-LOFT 531

- STOWAGE UNDER THE TWIN BEDS, EASILY ACCESSIBLE THANKS TO THE OPENING DOORS
- CLOTHES HANGERS AND SHELVES FOR THE BEST STORAGE OF YOUR CLOTHES AND ITEMS



T-LOFT 530



T-LOFT 530



T-LOFT 531



T-LOFT 531


TYPES OF BATHROOMS ON THE T-LOFT RANGE



Shower with marble-pattern finish panel


Bathroom equipped with storage, mirror and large washbasin

T-LOFT 450

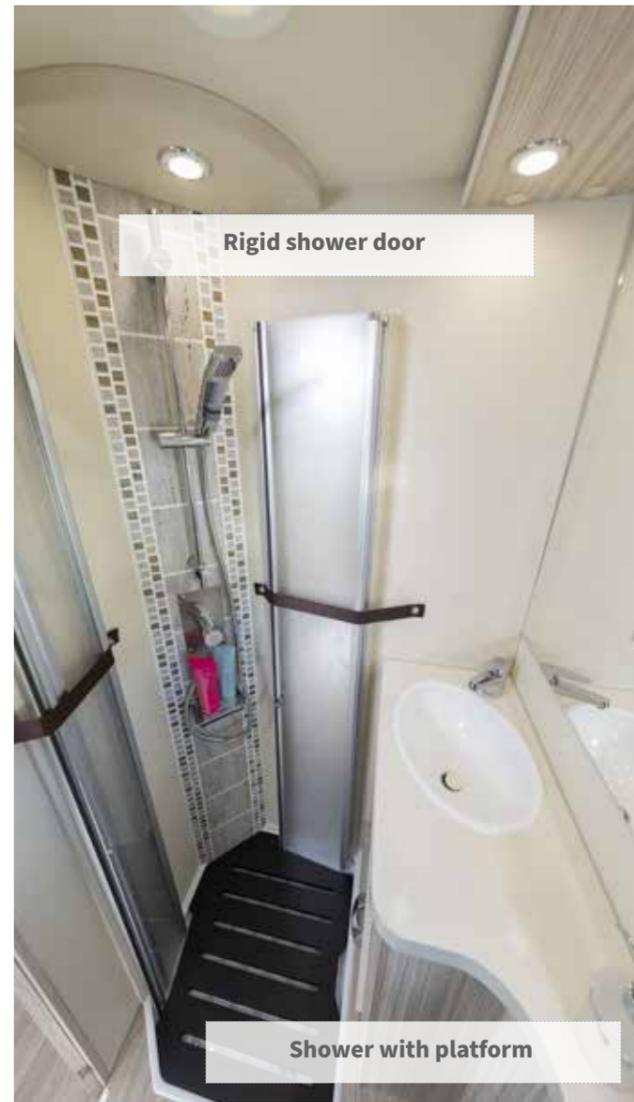


Rigid shower door


Shower with platform

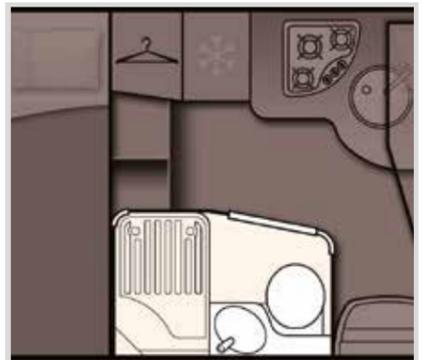

BATHROOM WITH SEPARATE SHOWER
T-Loft 450 – T-Loft 529

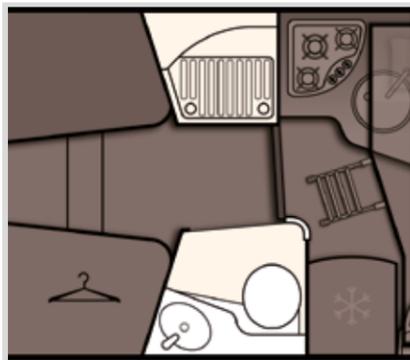


INDEPENDENT BATHROOM AND SHOWER
T-Loft 530 – T-Loft 581

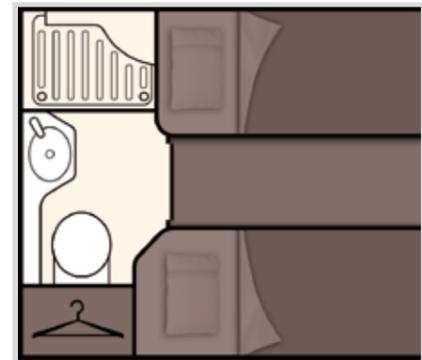

BATHROOM AND SHOWER AT THE END OF THE VEHICLE
T-Loft 531




- THE BATHROOM AREA IS VERY BRIGHT AND WELL VENTILATED THANKS TO THE WINDOW EQUIPPED WITH A BLIND AND FLYSCREEN.
- LARGE MIRROR AND WASHBASIN.
- WALL UNITS, CABINETS AND SHELVES TO KEEP EVERYTHING IN ORDER AND AT HAND

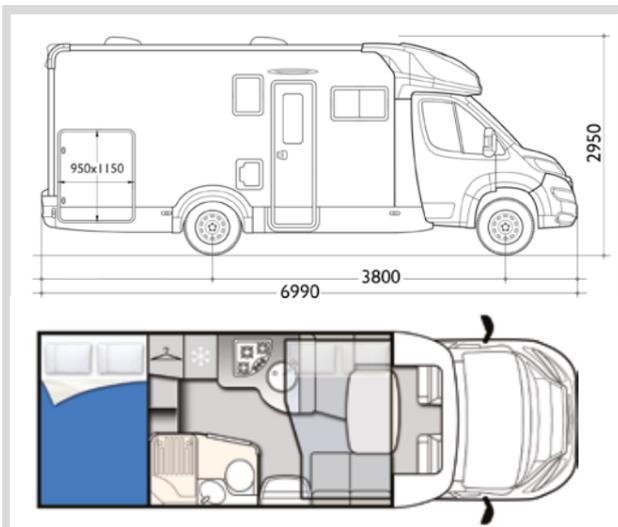

T-LOFT 450

5	4	3500 KG 2,3 MJT 140 CV	COMBI 4 DIESEL	142 LT.


External length (mm) / External width (mm)	6990 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	3800
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2960 - 3080
Max. user payload Min – Max (kg)*	420 - 540
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /100
Standard heating system	COMBI 4 DIESEL

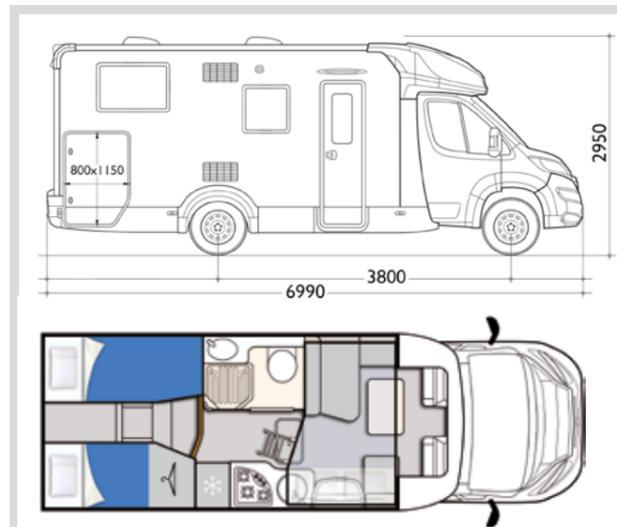

T-LOFT 529

5	4**	3500 KG 2,3 MJT 140 CV	COMBI 4 DIESEL	142 LT.

External length (mm) / External width (mm)	6990 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	3800
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2970 - 3080
Max. user payload Min – Max (kg)*	420 - 530
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /100
Standard heating system	COMBI 4 DIESEL

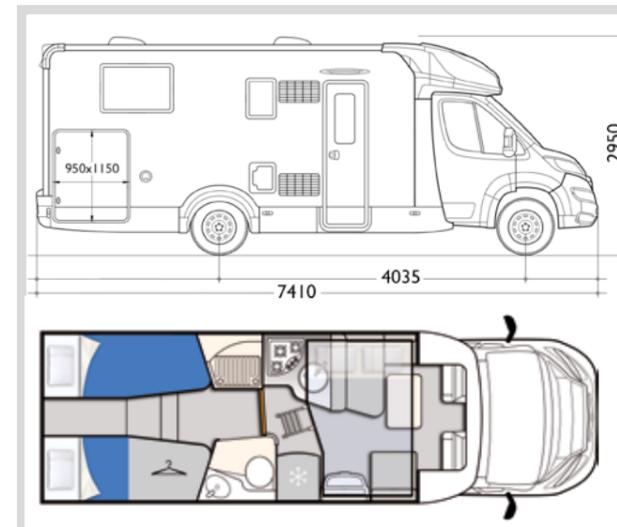


T-LOFT 530

5	4**	3500 KG 2,3 MJT 140 CV	COMBI 4 DIESEL	150 LT.

External length (mm) / External width (mm)	7410 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	4035
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2980 - 3075
Max. user payload Min – Max (kg)*	425 - 520
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /135
Standard heating system	COMBI 4 DIESEL

Transformation of twin beds into a maxi double bed - * Pls. Check 20 lts. filling before driving

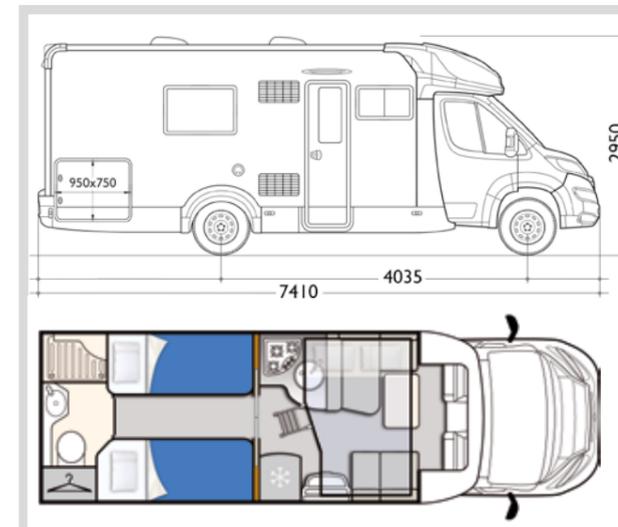


T-LOFT 531

5	4**	3500 KG 2,3 MJT 140 CV	COMBI 4 DIESEL	150 LT.

External length (mm) / External width (mm)	7410 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	4035
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	3015 - 3075
Max. user payload Min – Max (kg)*	425 - 485
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /135
Standard heating system	COMBI 4 DIESEL

*The values shown represent the minimum value of the vehicle in the basic configuration, and the maximum value that includes the maximum weight of accessories available and that can be installed in the basic configuration in the factory.

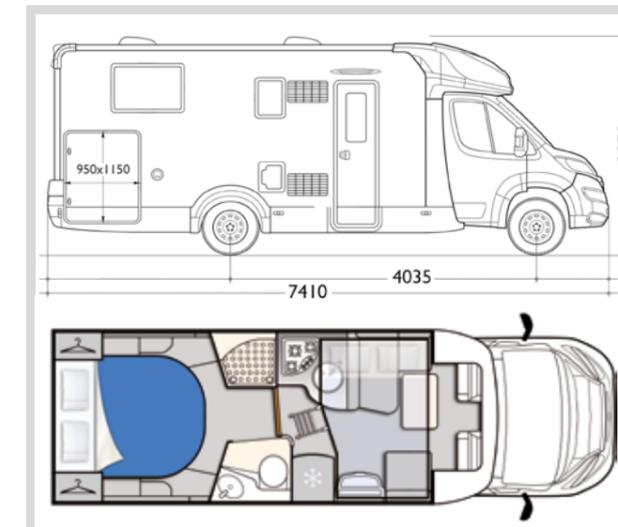

T-LOFT 581

5	4	3500 KG 2,3 MJT 140 CV	COMBI 4 DIESEL	150 LT.

External length (mm) / External width (mm)	7410 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	4035
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2995 - 3075
Max. user payload Min – Max (kg)*	425 - 505
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /135
Standard heating system	COMBI 4 DIESEL

ALL INCLUSIVE

- MANUAL CLIMATE CONTROL
- CRUISE CONTROL
- DOUBLE AIRBAG
- ELECTRIC REAR VIEW MIRRORS
- PLEATED SLIDING FLY SCREEN ON LIVING UNIT DOOR
- SEAT COVERS
- TV HOLDER
- CELL DOOR IN 2 POINTS WITH STORAGE AND DUSTBIN
- CENTRAL LOCKING
- SPEAKERS IN LIVING/SLEEPING AREA
- APPROVED 5TH SEAT
- FLOOR HATCH
- COMBI 4 DIESEL + CP PLUS
- BEDS WITH MANUAL UP AND DOWN (WHERE APPLICABLE)
- TRANSFORMATION OF TWIN BEDS INTO A MAXI DOUBLE BED
- SKY ROOF
- EURO 6D POWER UNIT
- ESC

MODEL	WEIGHT KG	T-LOFT 450	T-LOFT 529	T-LOFT 530	T-LOFT 531	T-LOFT 581
MECHANICAL UNIT	-	Fiat Ducato				
ENGINE, POWER HP	-	2,3 MJ - 140 CV				
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	-	3500	3500	3500	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS MIN / MAX (KG)	-	2960 / 3080	2970 / 3080	2980 / 3075	3015 / 3075	2995 / 3075
PAYLOAD MIN / MAX (KG)	-	420 - 540	420 - 530	425 - 520	425 - 485	425 - 505
WHEELBASE (MM)	-	3800	3800	4035	4035	4035
MAXIMUM TOWABLE WEIGHT (KG)	-	2000	2000	2000	2000	2000
WHEELS DIMENSIONS	-	15"	15"	15"	15"	15"
MANUAL AIR CONDITIONING	-	S	S	S	S	S
DRIVER AND PASSENGER AIRBAG	-	S	S	S	S	S
CRUISE CONTROL WITH SPEED LIMITER	-	S	S	S	S	S
ABS / ESC / TRACTION+	- / - / 1	S / S / O	S / S / O	S / S / O	S / S / O	S / S / O
SWIVELLING DRIVER AND PASSENGER'S SEAT	-	S / S	S / S	S / S	S / S	S / S
CAB SEAT COVERS	-	S	S	S	S	S
AUTOMATIC GEAR	33	0	0	0	0	0
PAINTED CAB	-	0	0	0	0	0
PAINTED FRONT BUMPER	-	S	S	S	S	S
DRL (DAY RUNNING LIGHT) / ANTI FOG LIGHTS	0,5 / 2	0 / 0	0 / 0	0 / 0	0 / 0	0 / 0
2 DIN RADIO / BLUETOOTH RADIO / STEERING WHEEL RADIO CONTROLS	2 / 3 / 1	0 / 0 / 0	0 / 0 / 0	0 / 0 / 0	0 / 0 / 0	0 / 0 / 0
DIMENSIONS AND PLACES						
EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	-	6990 / 2350	6990 / 2350	7410 / 2350	7410 / 2350	7410 / 2350
EXTERNAL HEIGHT (MM) / INTERNAL HEIGHT (MM)	-	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080
CAPACITÀ MAX SERBATOI: ACQUE CHIARE, ACQUE GRIGIE (L)**	-	5	5	5	5	5
BERTHS (OPTIONAL DINETTE)	-	4 (0)	4 (0)*	4 (0)*	4 (0)*	4 (0)
AUXILIARY BED IN DINETTE	5	0	0	0	0	0
REAR BED (CM)	-	140x220	83x200 / 83x190 - 182x212	83x200 / 83x200 - 182	75x190 / 75x205 - 140x212	160x190
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	-	216x110x60	216x107x57	216x107x57	216x114x87	216x107x57
OVERCAB BED (CM) / ELEVATING BED (CM)	-	- / 195x130x110				
ADDITIONAL SEAT REAR BED	-	S	S	S	S	S
LOCKER (USEFUL OPENING, CM)	-	115x95 / 115x95	115x80 / 115x80	115x95 / 115x95	95x75 dx / 85x45 sx	115x95 / 115x95
MAX. INTERNAL GARAGE HEIGHT (CM)	-	119	119	119	118	118
FLOOR / WALLS / ROOF THICKNESS (MM)	-	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31
FLOOR / WALLS / ROOF MATERIAL (MM)	-	VTR / VTR / VTR				
FIBERGLASS ROOF, HAIL-PROOF	-	S	S	S	S	S
INSTALLATIONS						
BURNERS / GAS OVEN / SUCTION HOOD	- / 14 / -	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S	3 / 0 / S
TANK CAPACITY - CLEAR WATER / WASTEWATER (L)**	-	20 (118) / 100	20 (118) / 100	20 (118) / 135	20 (118) / 135	20 (118) / 135
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)	-	142	142	149	149	149
COMPRESSOR FRIDGE (L)	-	-	-	-	-	-
STANDARD HEATING SYSTEM	-	Combi 4 Diesel				
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	-	2x15	2x15	2x15	2x15	2x15
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	-	S	S	S	S	S
SHOWER TRAY WITH DOUBLE DRAIN	-	S	S	S	S	S
INTEGRATED AND ISOLATED ENTRY STEP	- / 4	S / 0	S / 0	S / 0	S / 0	S / 0
HEATED GARAGE LOCKER	-	S	S	S	S	S
SKYLIGHT						
PANORAMIC ROOF	-	S	S	S	S	S
REAR SKYLIGHT (MM)	-	400x400 (S) / 960x655 (O)				
CENTRAL SKYLIGHT (MM)	-	400x400	400x400	400x400	400x400	400x400
DINETTE SKYLIGHT (MM)	-	-	-	-	-	-
SKYLIGHT TOILETTE/SHOWER (MM)	-	-	-	-	-	-
400x400 SKYLIGHT (MM) WITH FAN	1	0	0	0	0	0
DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET	-	S	S	S	S	S
EQUIPMENTS						
PLEATED CAB BLIND / THERMAL BLIND	6 / -	0 / S	0 / S	0 / S	0 / S	0 / S
CAB / BODY CARPET	- / 10	S / 0	S / 0	S / 0	S / 0	S / 0
CAB SEPARATION CURTAIN	-	S	S	S	S	S
REAR BED HEIGHT ADJUSTMENT	-	S	S	S	S	S
BEDS WITH STAVES	-	S	S	S	S	S
SWIVELLING LCD HOLDER	-	S	S	S	S	S
INTERNAL LED LIGHTENING	-	S	S	S	S	S
EXTERIORS						
REAR CAMERA WITH MONITOR INTEGRATED IN THE REAR MIRROR	1	0	0	0	0	0
SOLAR PANEL (FITTED) WITH REGULATOR	11	0	0	0	0	0
ENTRANCE DOOR WITH FIXED WINDOW	-	-	-	-	-	-
FLYSCREEN FOR ENTRANCE DOOR	-	S	S	S	S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	2	S	S	S	S	S
XL ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	-	-	-	-	-	-
STRIP OPENING WITH LOCKER	-	-	-	-	-	-
EXTERNAL LED LIGHT	-	S	S	S	S	S

* The values shown represent the minimum value of the vehicle in the basic configuration, and the maximum value that includes the maximum weight of accessories available and that can be installed in the basic configuration in the factory.
 **To increase the vehicle payload, when travelling it is possible to reduce the fresh water tank capacity to approx. 20 lt.

NOTES

The masses indicated in this catalogue refer to the provisions of European Directive 2007/46/EC.

MASS IN RUNNING ORDER

It includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and a gas tank for living purposes (20 kg). The mass in running order, and consequently the payload and/or certified seats may vary depending on the accessories installed.

PAYLOAD

This consists of the difference between the maximum technically permissible laden mass and the mass in running order. It includes elements for living purposes, the transported passengers defined by the manufacturer (driver excluded), and the personal effects.

The payload calculation is based on the following parameters: 75 kg for each passenger (driver excluded), 10 kg of baggage for each passenger and for the driver, 10 kg for each metre of length of the vehicle, plus the remaining payload, which can be used for the installation of accessories or for additional baggage.

All masses and loads of the empty vehicle have a tolerance of +/- 5%, in compliance with Directive 2007/46/EC.

Any optional equipment increases the mass in running order and decreases the payload. The weight of non-standard accessories is not included in the mass in running order indicated in this catalogue.

Additional accessories and devices reduce the payload by a quantity equal to their weight; the incidence of the weight of the individual accessories is shown in the special column in the technical data sheets or can be requested at our dealers.

In case certain accessories are installed (for example, additional elements such as coupling device or motorbike rack), the mass of these accessories will affect the payload, possibly reducing it along with the number of certified seats. Please note that the law does not allow the maximum permissible mass to be exceeded, which can be consulted under the specific heading of the data sheets.

Please make sure that the maximum loads on the axles and the maximum technically permissible load mass are not exceeded during the complete loading phase of the vehicle. The regulations and requirements of each country may entail changes in the characteristics of this table.

The number of certified seats may vary depending on the traffic regulations in force in each country. When driving, the fresh water tank must be filled to a maximum of 20 litres.



S= Standard O= Optional - = Not Available

MAGNUM

BUSINESS CLASS? NO, MAGNUM CLASS!



DRL

LEAVE YOUR WORK, THE CITY AND THE BUSTLE BEHIND.

CLIMB INTO YOUR MAGNUM AND YOU'RE OFF!

With Magnum, you'll be sure to reach your destination because the first one is ... your Magnum!

Magnum is the Elnagh top of the line: majestic, elegant and hospitable.




6990/7410 MM

5	4	3500 KG 2,3 MJT 140 CV	COMBI 4 DIESEL	142/150 LT.



MAGNUM 530

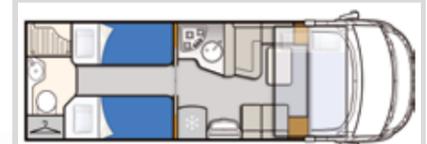

MAGNUM 531



MAGNUM 581



Panoramic rooflight 50x70 cm

Sound boxes integrated in the folding bed for the acoustic diffusion in the dinette

Pivoting TV holder

USB socket for recharging your multimedia devices

Folding table. Movable and with 360° rotation

MAGNUM 531

THE UPHOLSTERY OF THE MAGNUM RANGE



WAVE BEIGE




WAVE GREY



MAGNUM 531

TYPES OF DINETTE ON THE MAGNUM RANGE

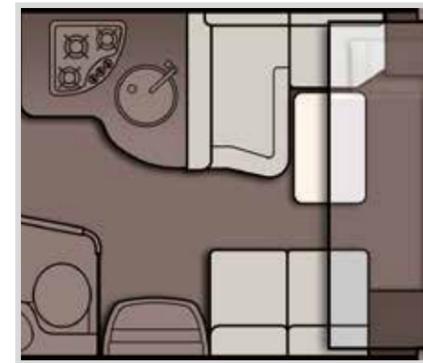

L-SHAPED DINETTE WITH DOUBLE SIDE BENCH

Magnum 531



L-SHAPED DINETTE WITH SIDE BENCH

Magnum 530 - Magnum 581



Handle for easy entry. Mirror at the entrance with LED light finish on the edge.

Cover panel under folding bed with integrated LED lights

Practical floor recessed stowage hatches

MAGNUM 631



Ergonomic, height-adjustable swivel cab seats with double armrest and integrated seat belt

Comfortable glove compartment in the cab

MAGNUM 581



Fabric panel covering and comfortable storage pockets

MAGNUM 581



1400 mm

1900 mm

MAGNUM 581



Panoramic rooflight 70x50 cm

MAGNUM 631

- FOLD-DOWN BED WITH SPACE-SAVING MOVEMENT: EVEN WHEN LOWERED, IT LEAVES THE DINETTE FREE AND USABLE
- SIDE BENCH FOR 5TH APPROVED SEAT WITH BELT
- PLEATED BLINDS IN THE CAB
- FUNCTIONAL SUNSHADE FOR A MORE COMFORTABLE AND SAFE DRIVING



Transparent rooflight 40x40 cm

Wall unit with double shelf for an optimal rationalisation of the space

Kitchen window protection panel

Partition door from sleeping area

MAGNUM 581



Large refrigerator 142 l / 150 l depending on model

Practical spice rack

MAGNUM 531



Extractor hood



Generously sized kitchen drawers

Kitchen peninsula with curved opening door

MAGNUM 581



Sliding basket and shelf under the kitchen peninsula

MAGNUM 531



Kitchen with 3 burners

MAGNUM 581



Transparent rooflight 40x40 cm with blind and flyscreen

Handy side shelves

Spotlights for evening reading

Transformation of twin beds into a maxi double bed up to 2000x2100 mm

MAGNUM 531



MAGNUM 530



MAGNUM 530



Partition door from sleeping area

Fold-down beds for easy access to the storage area below

MAGNUM 530



Speakers for sound diffusion in the room

Maximum relaxation thanks to reclining backrests (Magnum 531)

MAGNUM 531



MAGNUM 531




Large and functional storage compartment under the double bed

MAGNUM 581



Height-adjustable bed

MAGNUM 581

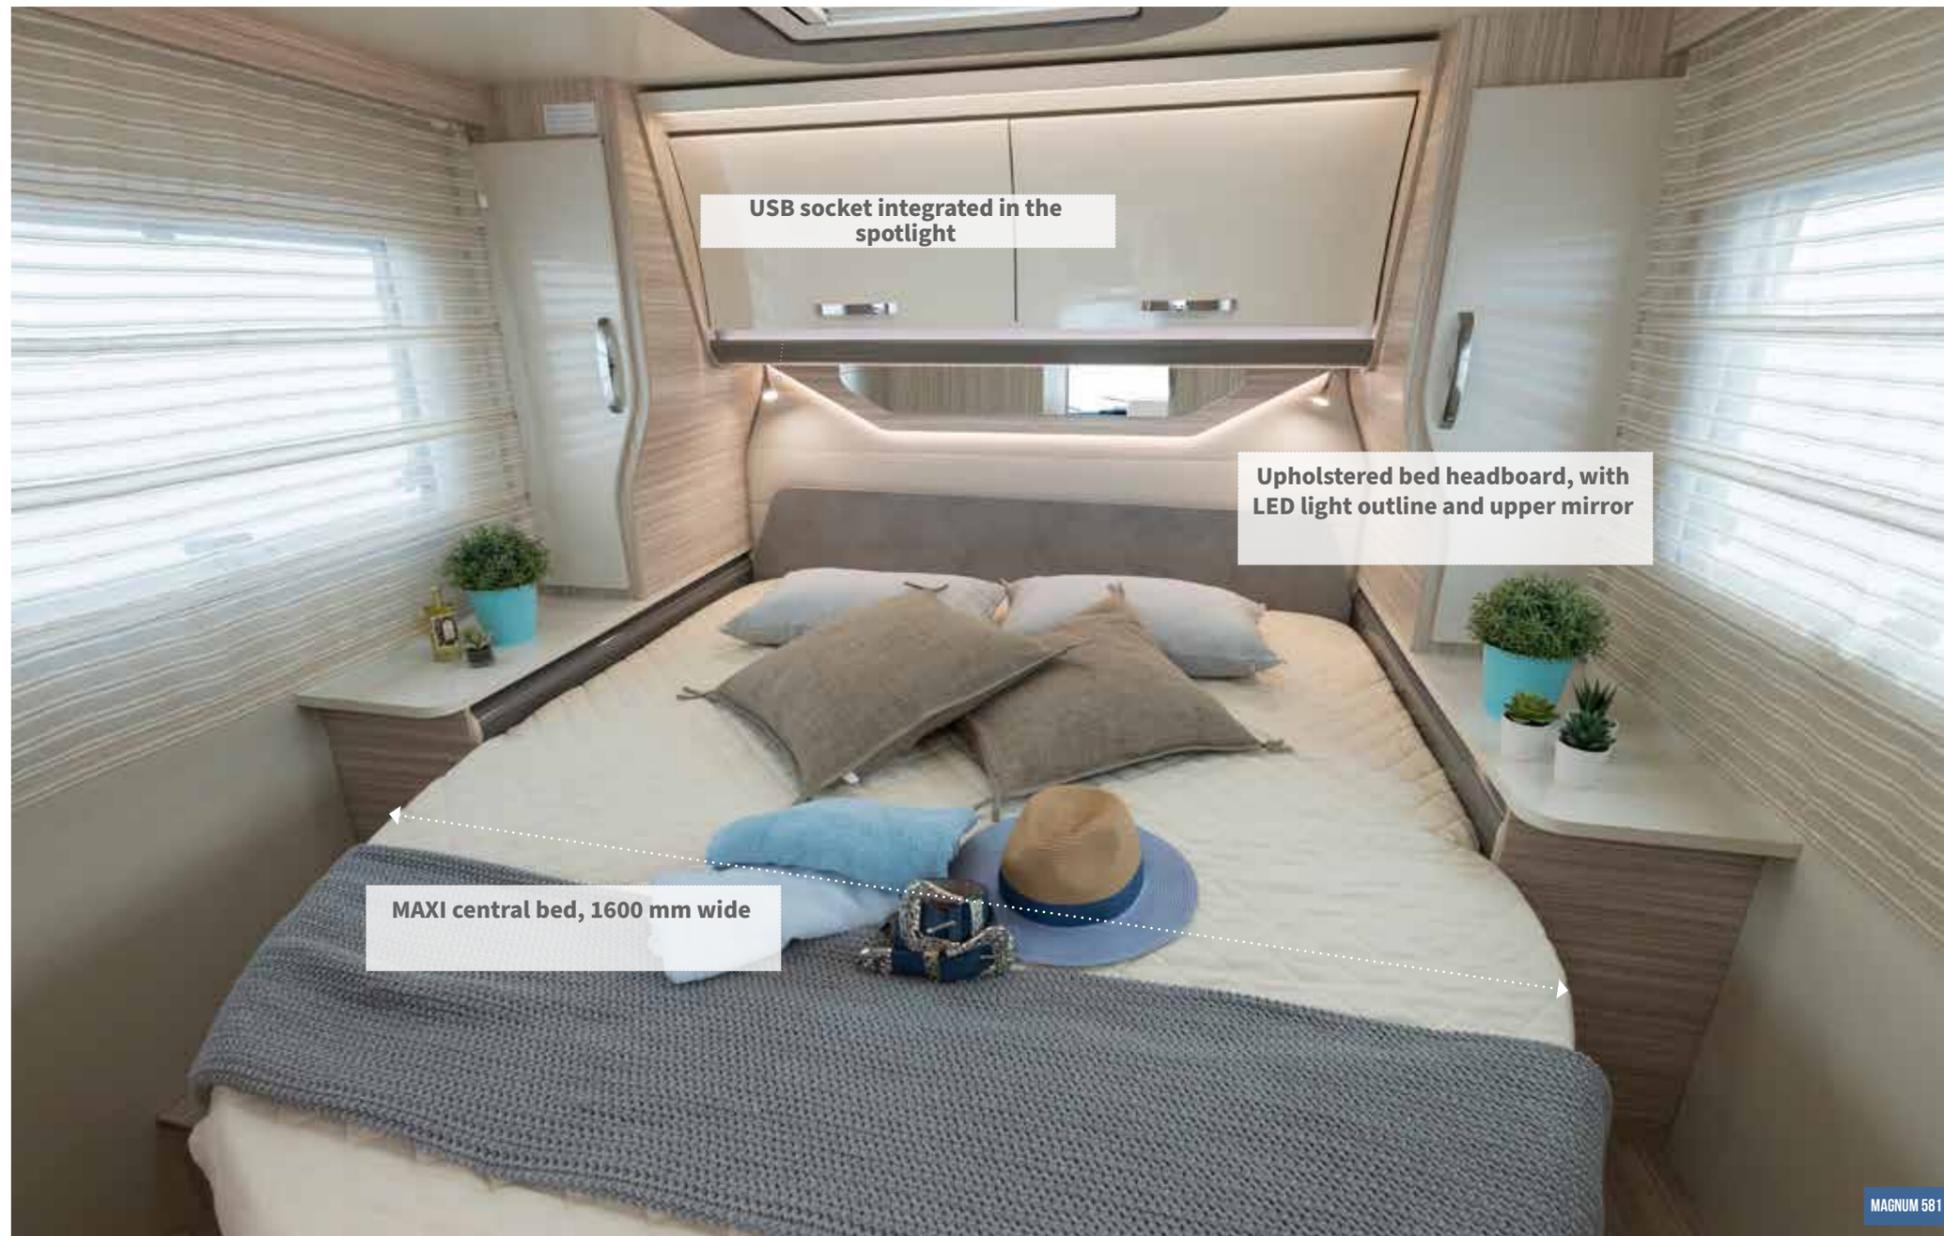

USB socket integrated in the spotlight

Upholstered bed headboard, with LED light outline and upper mirror

MAXI central bed, 1600 mm wide

MAGNUM 581



MAGNUM 531



Storage compartments inside the steps

MAGNUM 530



MAGNUM 581

TYPES OF BATHROOMS ON THE MAGNUM RANGE



Bathroom window with blinds

Rigid shower door


MAGNUM 629




Shower with platform

Shower with marble-pattern finish panel

MAGNUM 531

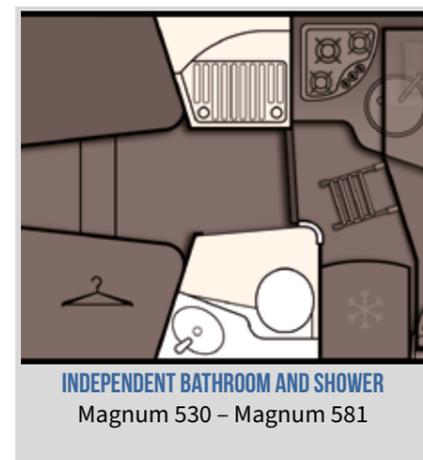

INDEPENDENT BATHROOM AND SHOWER
Magnum 530 – Magnum 581

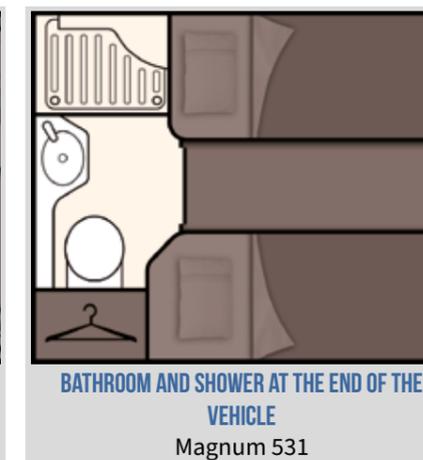

BATHROOM AND SHOWER AT THE END OF THE VEHICLE
Magnum 531



MAGNUM 581






MAGNUM 531



MAGNUM 530

- THE BATHROOM AREA IS VERY BRIGHT AND WELL VENTILATED THANKS TO THE WINDOW EQUIPPED WITH A BLIND AND FLYSCREEN.
- LARGE MIRROR AND WASHBASIN.
- WALL UNITS, CABINETS AND SHELVES TO KEEP EVERYTHING IN ORDER AND AT HAND

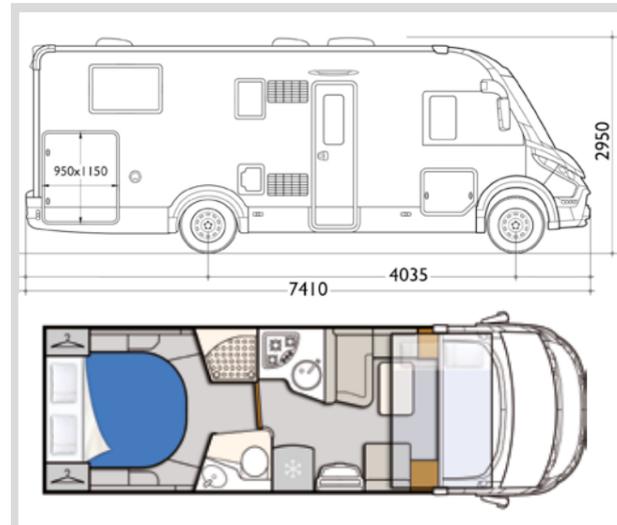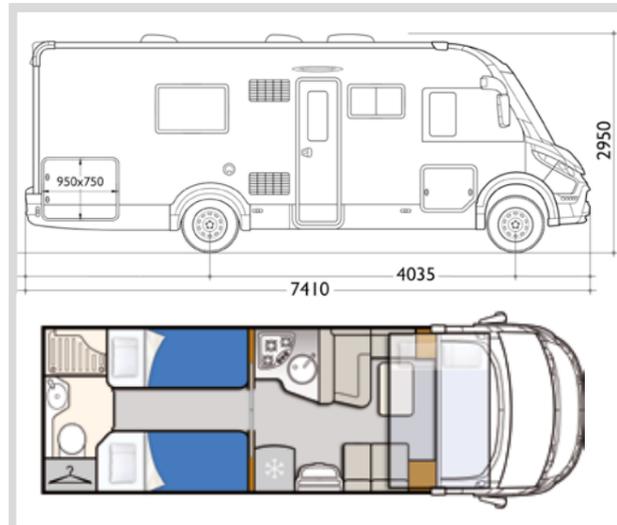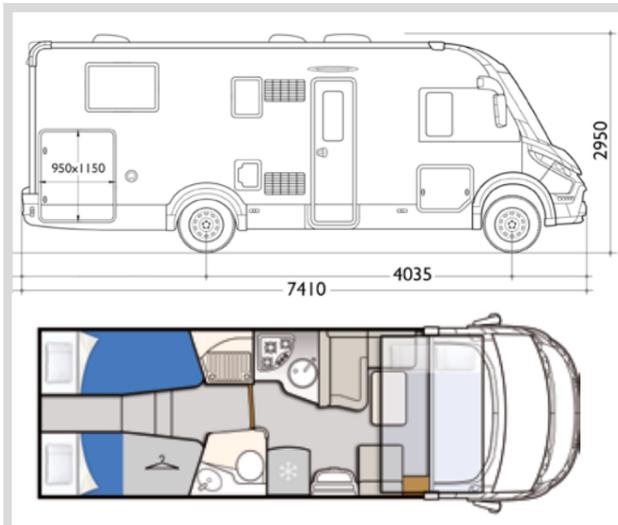

MAGNUM 530

MAGNUM 531

MAGNUM 581

5	4**	3500 KG 2,3 MJT 140 CV	COMBI 4 DIESEL	150 LT.

5	4**	3500 KG 2,3 MJT 140 CV	COMBI 4 DIESEL	150 LT.

5	4	3500 KG 2,3 MJT 140 CV	COMBI 4 DIESEL	150 LT.

External length (mm) / External width (mm)	7410 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	4035
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	2980 - 3075
Max. user payload Min - Max (kg)*	425 - 520
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /135
Standard heating system	COMBI 4 DIESEL

External length (mm) / External width (mm)	7410 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	4035
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	3010 - 3075
Max. user payload Min - Max (kg)*	425 - 490
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /135
Standard heating system	COMBI 4 DIESEL

External length (mm) / External width (mm)	7410 / 2350
External height(mm) / Internal height (mm)	2950 / 2080
Wheelbase (mm)	4035
Maximum technically permissible weight (Kg)	3500
Weight in running conditions Min - Max (Kg)*	3015 - 3075
Max. user payload Min - Max (kg)*	425 - 485
Maximum towable weight (kg)	2000
Fresh water tank Lt. (total capacity when on the way)***	20 (118) /135
Standard heating system	COMBI 4 DIESEL

Transformation of twin beds into a maxi double bed - * Pls. Check 20 lts. filling before driving



*The values shown represent the minimum value of the vehicle in the basic configuration, and the maximum value that includes the maximum weight of accessories available and that can be installed in the basic configuration in the factory.

ALL INCLUSIVE

- MANUAL CLIMATE CONTROL
- CRUISE CONTROL
- DOUBLE AIRBAG
- ELECTRIC REAR VIEW MIRRORS
- PLEATED SLIDING FLY SCREEN ON LIVING UNIT DOOR
- PLEATED BLINDS
- PANORAMIC ROOFLIGHT 50X70 CM
- TV HOLDER
- CELL DOOR IN 2 POINTS WITH STORAGE AND DUSTBIN
- CENTRAL LOCKING
- SPEAKERS IN LIVING/SLEEPING AREA
- APPROVED 5TH SEAT
- FLOOR HATCH
- COMBI 4 DIESEL + CP PLUS
- BEDS WITH MANUAL UP AND DOWN (WHERE APPLICABLE)
- TRANSFORMATION OF TWIN BEDS INTO A MAXI DOUBLE BED
- EURO 6D POWER UNIT
- ESC
- DRL

MODEL	WEIGHT KG	MAGNUM 530	MAGNUM 531	MAGNUM 581
MECHANICAL UNIT	-	Fiat Ducato	Fiat Ducato	Fiat Ducato
ENGINE, POWER HP	-	2,3 MJ - 140 CV	2,3 MJ - 140 CV	2,3 MJ - 140 CV
MAXIMUM TECHNICALLY PERMISSIBLE WEIGHT (KG)	-	3500	3500	3500
WEIGHT UNLADEN IN RUNNING CONDITIONS MIN / MAX (KG)	-	2980 / 3075	3010 / 3075	3015 / 3075
PAY LOAD MIN / MAX (KG)	-	425 / 520	425 / 490	425 / 485
WHEELBASE (MM)	-	4035	4035	4035
MAXIMUM TOWABLE WEIGHT (KG)	-	2000	2000	2000
WHEELS DIMENSIONS	-	15"	15"	15"
MANUAL AIR CONDITIONING	-	S	S	S
DRIVER AND PASSENGER AIRBAG	-	S	S	S
CRUISE CONTROL WITH SPEED LIMITER	-	S	S	S
ABS / ESC TRACTION+	- / - / 1	S / S / O	S / S / O	S / S / O
SWIVELLING DRIVER AND PASSENGER'S SEAT	-	S / S	S / S	S / S
CAB SEAT COVERS	-	-	-	-
AUTOMATIC GEAR	33	0	0	0
PAINTED CAB	-	-	-	-
PAINTED FRONT BUMPER	-	-	-	-
DRL (DAY RUNNING LIGHT) / ANTIFOG LIGHTS	0,5 / 2	- / -	- / -	- / -
2 DIN RADIO / BLUETOOTH RADIO / STEERING WHEEL RADIO CONTROLS	2 / 3 / 1	0 / 0 / 0	0 / 0 / 0	0 / 0 / 0
DIMENSIONS AND PLACES				
EXTERNAL LENGTH (MM) / EXTERNAL WIDTH (MM)	-	7410 / 2350	7410 / 2350	7410 / 2350
EXTERNAL HEIGHT (MM) / INTERNAL HEIGHT (MM)	-	2950 / 2080	2950 / 2080	2950 / 2080
CAPACITÀ MAX SERBATOI: ACQUE CHIARE, ACQUE GRIGIE (L**)	-	5	5	5
BERTHS (OPTIONAL DINETTE)	-	4 (0)*	4 (0)*	4 (0)
AUXILIARY BED IN DINETTE	5	0	0	0
REAR BED (CM)	-	83x200 / 83x200 - 182x212	75x190 / 75x205 - 140x212	160x190
DIMENSIONS AUXILIARY BED IN DINETTE (CM)	-	216x120x87	216x120x87	216x120x57
OVERCAB BED (CM) / ELEVATING BED (CM)	-	- / 190x140	- / 190x140	- / 190x140
ADDITIONAL SEAT REAR BED	-	-	S	S
LOCKER (USEFUL OPENING, CM)	-	115x95 / 115x95	95x75 / 85x45	115x95 / 115x95
MAX. INTERNAL GARAGE HEIGHT (CM)	-	118	77	117
FLOOR / WALLS / ROOF THICKNESS (MM)	-	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31
FLOOR / WALLS / ROOF MATERIAL (MM)	-	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR
FIBERGLASS ROOF, HAIL-PROOF	-	S	S	S
INSTALLATIONS				
BURNERS / GAS OVEN / SUCTION HOOD	- / 14 / -	3 / 0 / S	3 / 0 / S	3 / 0 / S
TANK CAPACITY - CLEAR WATER / WASTEWATER (L**)	-	20 (118) / 135	20 (118) / 135	20 (118) / 135
AUTOMATIC TRIVALENT FRIDGE (220V, 12V, GAS) (L)	-	149	-	149
COMPRESSOR FRIDGE (L)	-	-	-	-
STANDARD HEATING SYSTEM	-	Combi 4 Diesel	Combi 4 Diesel	Combi 4 Diesel
SPACE FOR 2 GAS BOTTLES (TOT. MAX 15 KG)	-	2x15	2x15	2x15
BATHROOM WINDOW (DOUBLE OPAQUE GLASS)	-	S	S	S
SHOWER TRAY WITH DOUBLE DRAIN	-	-	S	-
INTEGRATED AND ISOLATED ENTRY STEP	- / 4	S / O	S / O	S / O
HEATED GARAGE LOCKER	-	S	S	S
SKYLIGHT				
PANORAMIC ROOF	-	-	-	-
REAR SKYLIGHT (MM)	-	400x400 (S) / 960x655 (O)	400x400 (S) / 960x655 (O)	400x400 (S) / 960x655 (O)
CENTRAL SKYLIGHT (MM)	-	400x400	400x400	400x400
DINETTE SKYLIGHT (MM)	-	700x500 (S) / 960x655 (O)	700x500 (S) / 960x655 (O)	700x500 (S) / 960x655 (O)
SKYLIGHT TOILETTE/SHOWER (MM)	-	-	-	-
400x400 SKYLIGHT (MM) WITH FAN	1	0	0	0
DOUBLE-GLAZED WINDOWS WITH BLIND MOSQUITO NET	-	S	S	S
EQUIPMENTS				
PLEATED CAB BLIND / THERMAL BLIND	6 / -	S / -	S / -	S / -
CAB / BODY CARPET	- / 10	S / O	S / O	S / O
CAB SEPARATION CURTAIN	2,5	-	-	-
REAR BED HEIGHT ADJUSTMENT	-	-	-	S
BEDS WITH STAVES	-	S	S	S
SWIVELLING LCD HOLDER	-	S	S	S
INTERNAL LED LIGHTENING	-	S	S	S
EXTERIORS				
REAR CAMERA WITH MONITOR INTEGRATED IN THE REAR MIRROR	1	0	0	0
SOLAR PANEL (FITTED) WITH REGULATOR	11	0	0	0
ENTRANCE DOOR WITH FIXED WINDOW	-	-	-	-
FLYSCREEN FOR ENTRANCE DOOR	-	S	S	S
ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	2	S	S	S
XL ENTRANCE DOOR WITH TWO CENTRAL LOCKING POINTS	-	-	-	-
STRIP OPENING WITH LOCKER	-	-	-	-
EXTERNAL LED LIGHT	-	S	S	S

* The values shown represent the minimum value of the vehicle in the basic configuration, and the maximum value that includes the maximum weight of accessories available and that can be installed in the basic configuration in the factory.
 **To increase the vehicle payload, when travelling it is possible to reduce the fresh water tank capacity to approx. 20 lt.

NOTES

The masses indicated in this catalogue refer to the provisions of European Directive 2007/46/EC.

MASS IN RUNNING ORDER

It includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and a gas tank for living purposes (20 kg).
 The mass in running order, and consequently the payload and/or certified seats may vary depending on the accessories installed.

PAYLOAD

This consists of the difference between the maximum technically permissible laden mass and the mass in running order. It includes elements for living purposes, the transported passengers defined by the manufacturer (driver excluded), and the personal effects.

The payload calculation is based on the following parameters: 75 kg for each passenger (driver excluded), 10 kg of baggage for each passenger and for the driver, 10 kg for each metre of length of the vehicle, plus the remaining payload, which can be used for the installation of accessories or for additional baggage.

All masses and loads of the empty vehicle have a tolerance of +/- 5%, in compliance with Directive 2007/46/EC.

Any optional equipment increases the mass in running order and decreases the payload.

The weight of non-standard accessories is not included in the mass in running order indicated in this catalogue.

Additional accessories and devices reduce the payload by a quantity equal to their weight; the incidence of the weight of the individual accessories is shown in the special column in the technical data sheets or can be requested at our dealers.

In case certain accessories are installed (for example, additional elements such as coupling device or motorbike rack), the mass of these accessories will affect the payload, possibly reducing it along with the number of certified seats. Please note that the law does not allow the maximum permissible mass to be exceeded, which can be consulted under the specific heading of the data sheets.

Please make sure that the maximum loads on the axles and the maximum technically permissible load mass are not exceeded during the complete loading phase of the vehicle.

The regulations and requirements of each country may entail changes in the characteristics of this table.

The number of certified seats may vary depending on the traffic regulations in force in each country.

When driving, the fresh water tank must be filled to a maximum of 20 litres.



S= Standard O= Optional - = Not Available

SAFETY AND MECHANICAL PARTS

FIAT

Created from the continuous cooperation with manufactures, Fiat Ducato is the perfect combination of chassis and living unit. There are many presettings to facilitate the transformation, a specific electrical system and a cab designed with reinforced uprights and pre-cut roof.

Extended rear track: 1980 mm. A width compared to the standard commercial vehicle track width greater of 19 cm. More width means more space for internal living and greater stability.



STANDARD EQUIPMENT:



MANUAL CAB CLIMATE CONTROL: enhanced and diffused ventilation to the entire cab.



CRUISE CONTROL: for complete relaxation at the wheel, the speed is constant and the foot is free to move. Includes Speed limiter, which prevents you from exceeding the set maximum speed.



ESC: Electronic Stability Control, monitors acceleration, speed and grip. Includes roll-over mitigation, which improves stability by reducing roll, LAC (Load Adaptive Control) supervises the load distribution, ARS which prevents the drive wheels from slipping during acceleration.



MSR: (Motor Schleppmoment Regelung) prevents loss of grip in rough manoeuvres, HBA (Hydraulic Brake Assistance) helps the emergency braking, Hill Holder that keeps the vehicle stationary in the departures uphill.



TRACTION +: is the device to control the stability of the vehicle in conditions of poor grip of a single driving wheel. Includes Hill Descent Control for controlled speed on steep descents while saving brakes.



AUTOMATIC TRANSMISSION: 9-speed, for a relaxed and pleasant driving experience. Better performance: up to 12.5% more torque.

YOU CAN CHOOSE AMONG SOME OPTIONS:

SAFETY AND MECHANICAL PARTS

CITROËN

The style of the Citroën Jumper models is modern and takes up the latest codes of the brand: the signature of the chevrons combined with the daytime running lights, fluid lines not aggressive, but that transmit safety and robustness.

Inside Citroën vehicles, the interiors are welcoming and can be configured with swivel seats to facilitate movement on board. There are numerous practical and easily accessible compartments and the structure of the controls allows the driver to have everything within reach and sight (gear lever in the high position, central touch pad, ...).

The engine of the Citroën Jumper is equipped with the latest SCR-Ad-blue technology and complies with Euro 6.2 anti-pollution standards, thus reducing fuel consumption and CO2 emissions



STANDARD EQUIPMENT:

- **MANUAL CAB CLIMATE CONTROL**
- **ESC**
- **CRUISE CONTROL**
- **DOUBLE AIRBAG**
- **ELECTRIC HEATED DOOR MIRRORS**
- **HEIGHT-ADJUSTABLE SEATS WITH DOUBLE ARMREST**
- **DASHBOARD USB SOCKET + CUP HOLDER**
- **RADIO SETUP + CAB SPEAKERS**
- **LEATHER COVERED STEERING WHEEL AND GEAR LEVER KNOB**
- **TPMS: TYRE PRESSURE MONITORING SYSTEM**
- **ECO PACK: COMPOSED OF:**
 - **START AND STOP SYSTEM: FOR LOWER FUEL CONSUMPTION. AUTOMATICALLY RESTARTS WHEN THE ACCELERATOR PEDAL IS TOUCHED**
 - **SMART ALTERNATOR: INTELLIGENT ALTERNATOR THAT SUPPLIES ONLY THE NECESSARY ENERGY AND HIGH FUEL EFFICIENCY.**
 - **ELECTRONIC FUEL PUMP: FOR ENERGY SAVING**
- **AUTOMATIC LIGHTS**
- **RAIN SENSORS**
- **CITROËN CHROME FRONT GRILLE**



QUALITY AND TEST



BECAUSE WE KNOW THAT SATISFYING OUR CUSTOMERS DEPENDS GREATLY ON THE QUALITY OF OUR PRODUCTS.

Elnagh puts its own experience and expertise at the service of every van produced and follows it throughout the production stage with inspections and tests from design to delivery that meet European standards.

The same quality standards are demanded of suppliers: for the most strategic components, a check is carried out when the material is received and before it is used in production.




Test on operation of the gas pipes.




Check of operation and correct installation of the electrical systems.



Gas system inspection by certified staff according to the German DVGW protocol.

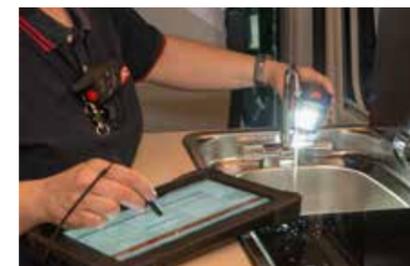

100 statistical checks on a percentage of the vehicles produced: aesthetic, functional, noise and fitting tests.

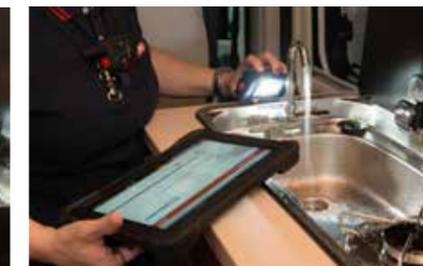

Correct installation of the hydraulic systems.



100% electronic weighing of vehicles before delivery.





SEA S.p.A. operates with an Integrated Environment and Safety Management System.

NOTES

ELNAGH reserves itself the right to change the characteristics and the furnishings of all its models with no advance notice required; all data contained in this leaflet must therefore be considered approximate and non-binding. Despite thorough checks of the contents, we cannot exclude possible printing and/or translating errors.

This catalogue does not constitute contractual documentation.

For the above reasons, all information relating to the specifications and equipment of each model must be requested prior to purchase from the dealer, who, as the sole contact person, will confirm or correct the data published by updating the customer on the characteristics and actual equipment of the relevant vehicle being negotiated.

Any reproduction, including in part, of the text or of the content of this document is prohibited.

The indicated weights are exclusively approximated. Tolerances of +/-5 % are allowed.

Generally speaking, special equipment and options increase the no-load weight and entail a reduction in the payload.

We hereby decline any and all responsibility in case structural changes are made to the vehicle; any assembly, disassembly or changes carried out by unauthorised workshops may jeopardise your safety and cause the warranty clauses to be forfeited.

For additional information on installation and technical details, please contact one of our dealers.

ELNAGH

Just a click away!

The ELNAGH world at the click of a button.
On **www.elnagh.com** every product detail, model photos,
sales network.

All the innovations in real time, special initiatives, limited
offers and much more.



Connect from your PC, tablet or smartphone and discover
the ELNAGH web world!



www.elnagh.com

